

New Plug Cap for Improved Watertightness and a More Secure Fit

Product Improvement Description



New plug cap

- ✓ Prevents water leakage through lockout hole
- ✓ Offers more secure fit than previous models
- ✓ Provides IP66/IP67 watertightness
- ✓ Is available for DSN (all sizes), DS60/DS100C and DR100 models only

Ordering Instructions and Pricing

Part Number	Where Used	Available to Ship
61-1A426	DSN20	Immediately
61-3A426	DSN30	January 1, 2014
61-6A426	DSN60	January 1, 2014
31-6A426	DS60, DS100C and DR100	January 1, 2014

Note: Future editions of the product catalog will include the new part number in the appropriate sections.

FAQ

Does the cap provide NEMA 4 watertightness?

The new cap effectively provides Type 4 watertightness but it is not officially Type 4 rated. The cap is IP66/IP67 rated. Meltric recommends this cap as the best solution available for washdown or dusty environments.

Will the old style cap still be available?

The older style protective caps will not be available going forward. Meltric recommends the new plug caps over the old style caps because the new plug caps completely cover the lockout hole on the male inlet.



Instructions

INSTRUCTIONS

PLUG/INLET CAP

See reverse side if picture doesn't match product.




! Before assembly, disconnect all sources of power to the circuit to eliminate the risk of electrical shock. This product must be installed by a certified personnel.

INSTALLATION:

1. Position the base of the plug cap between the voltage gasket and accessory (handle, angle or surface box) and the base of the plug.
2. Fasten plug assembly to accessory securely with screws supplied with your accessory.

OPERATION:

1. Push plug cap all the way in. **NOTICE:** If plug cap is not properly pushed in, watertightness will not be achieved.

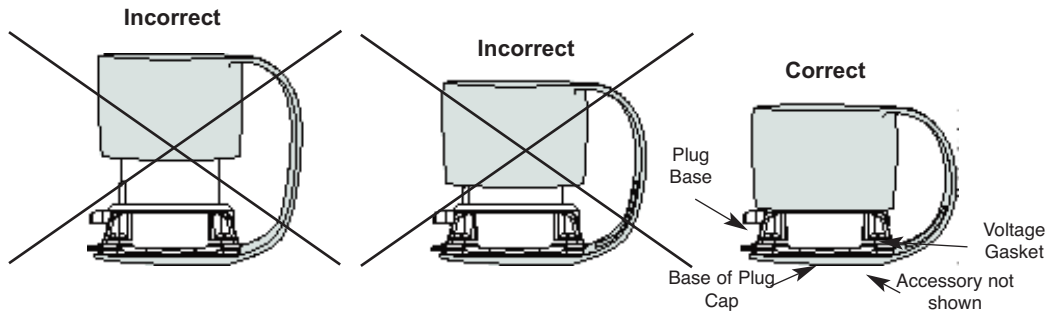

4640 Ironwood Dr. • Franklin, WI 53132 • 800.433.7642 • Fax: 414.817.6161

INSPLUG-CAP F