

16 A

480 V
U_{MAXI}

CONNECTOR PNC



IP66
IP67
IP69



0,75 mm²
2,5 mm²



GRP



IK08



-40 °C
+100 °C

OTHER FEATURES

Permitted current range	4-20 mA/16 A
Impulse withstand voltage	5 kV
Contact resistance	< 2 mΩ
Polarity	4P+E
Casing/insulator	Glass reinforced thermoplastics UL94 V-0
Vibrations	Frequency range 5-1 000 Hz, 1 g (1 h 30 on each critical frequency) according to IEC/EN 60068-2-6
Load cycles	> 2 000 cycles
IP (socket-outlet with cap)	IP66/IP67/IP69
IP (connected plug)	IP66/IP67 IP68 test at 10m deep during 15 days (contact us for these references) IP69
Salt mist	50 000 hours

REFERENCES AND ACCESSORIES

SOCKET-OUTLET

female
(with M25 lock nut)
PNC



INLET male
(with M25 lock nut)
PNC



480 V AC	4+E	01E4007	01E8007
----------	-----	---------	---------

COUPLER

socket female
PNC






PLUG male
PNC




480 V AC	4+E	01E3007	01E1007
----------	-----	---------	---------

Cable diameter 11-15 mm (smaller diameter available according to specification).

ACCESSORIES		Reference
INLET CAP		
	Socket-outlet cap	01EA125
	Plug cap	01EA126
ADAPTER PLATE FOR DSN1 OR DXN1 ACCESSORIES		
		251A457-E
STRAIGHT SLEEVE		
		01EA127

HANDLE	Input/Cable outer Ø	Reference
HANDLE WITHOUT CABLE GLAND		
	M20	01EA253417
CABLE GLAND		
	5-12 mm	9PEM20POLY+J
	3-9 mm	9PEM20RNPOL+J

DRAWINGS AND DIMENSIONS

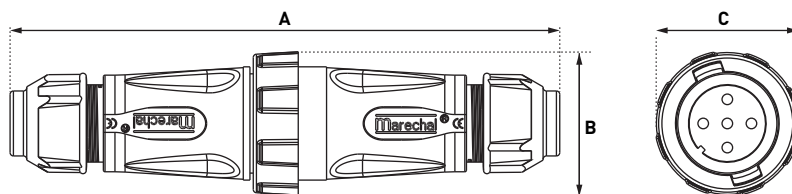

A	B	C
165	45	45