DATA CENTER SOLUTIONS

HIGH-PERFORMANCE SWITCH-RATED PLUGS & RECEPTACLES

FOR GREATER PUE, UPTIME, AND HEAT-MITIGATION



SWITCH-RATED PLUGS AND RECEPTACLES

The MELTRIC[®] Advantage Exclusive Switch-Rated Safety

MELTRIC[®] Switch-Rated plugs and receptacles combine the safety and functionality of a switch with the convenience of a plug and receptacle. They help ensure worker safety while reducing equipment and labor costs. They are UL/CSA rated for motor circuit and branch circuit disconnect switching, and meet NEC code requirements for line-of-sight disconnects. Switch-Rated plugs and receptacles eliminate the need for expensive auxiliary disconnects and enable plug-and-play equipment changeouts.

Simplify Maintenance Efficiency

Plug-and-play connections streamline maintenance during downtime events.

Superior Safety Ensured

Prevent exposure to arc flash and live parts, simplify NEC, NFPA 70B, and NFPA 70E compliance.

Versatile Compatibility

00

00

00 | 00 | 000 |

0 0

Wide range of configurations available to accommodate data center equipment requirements. MELTRIC devices combine a UL-listed disconnect, safety switch, and electrical connection into a single solution—saving space, time, and costs. Advanced safety features minimize the need for PPE, as the Switch-Rated plug and receptacle serve as an NEC-approved line-of-sight disconnect, providing instant zero-energy visual-verification with LOTO directly on the device.




Eliminate the need for a separate bus disconnect and pin-and-sleeve device, **MELTRIC** delivers the functionality of both in one compact unit!

POWER USAGE EFFECTIVENESS Stop Wasting Expenses to Heat


Did You Know?

UP TO 40% OF PUE CAN BE CONSUMED IN A DATA CENTER FOR COOLING PURPOSES.

Loss

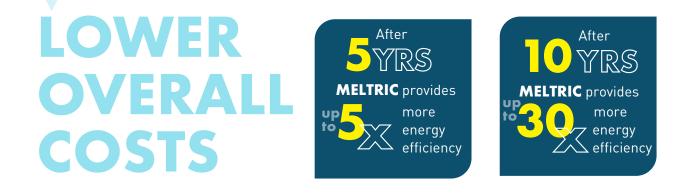

MELTRIC® IS **30X** MORE ENERGY EFFICIENT AFTER 10 YEARS

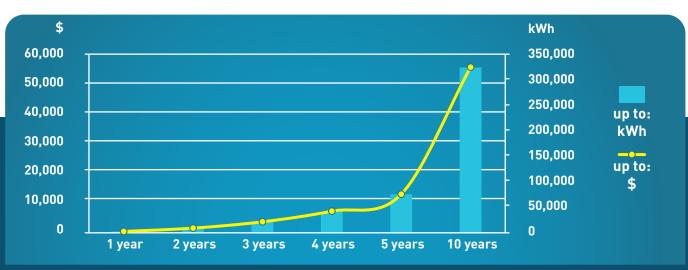



Based on laboratory tests comparing the performance of MELTRIC spring contacts and traditional pin and sleeve contacts. 250 devices total - 100x 20A, 70x 30A, 50x 60A, 30x 150A. 24/7/365 at \$0.1626/kWh.



MELTRIC Design Mitigates Energy Loss Reducing Significant Energy Overconsumption

Unique silver-nickel contact material lowers resistance ensuring optimal energy transfer during working lifespan.

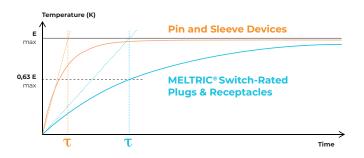




Premium silver-nickel used in butt-style contacts ensure an extremely low contact resistance thus reducing errant heat production.

Switch-Rated Technology Optimizes Energy Transfer Saving Data Centers Substantial Costs in Cooling



Heat Regulation = Long Lifespan

PIN-AND-SLEEVE COMPETITOR



Heat Loss = Short Lifespan

LESS HEATING = LESS COOLING DEMAND The low Joule effect of **MELTRIC**[®] devices reduce energy consumption and improve your total PUE.

71,5 °C

70.0

60.0

50.0

40,0


30.0

20,0

16.9 °C

MELTRIC Switch-Rated Plugs and Receptacles are Ideal for Connecting Power Throughout your Data Center

DATA CENTER WEB PAGE >>

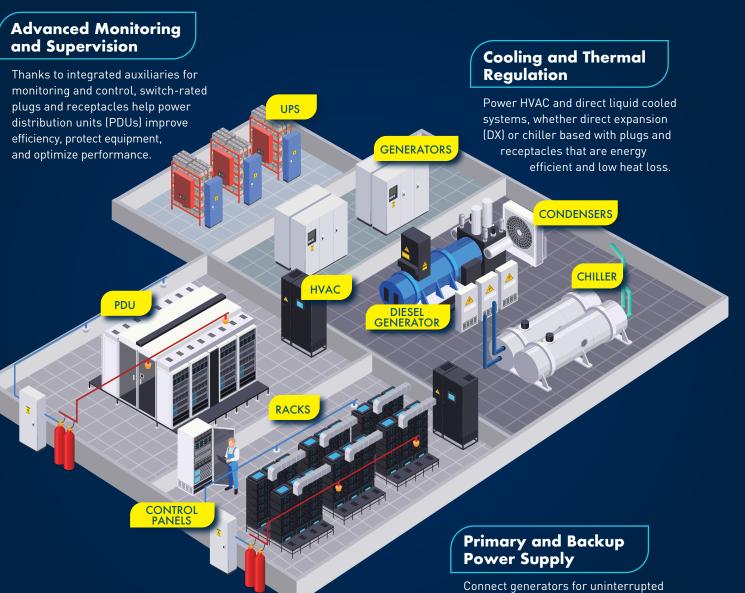

Power Distribution and Management

Easily connect junctions between distribution cabinets and equipment, transformers, and power management systems.

Connect generators for uninterrupted energy supply, uninterruptable power supplies (UPS), for protection against unexpected power outages and voltage fluctuations.

Switch-Rated Plugs & Receptacles Uniquely Allow You to Disconnect Individual Pieces of Equipment Without Requiring a Full Shutdown

ALL AT THE PUSH OF A BUTTON



Electrical Connection Solutions for Your Industrial Applications

In addition to the innovative Switch-Rated devices featured in this brochure, MELTRIC offers a full line of industrial plugs and receptacles providing solutions for a broad range of electrical connection applications.

Explore the Complete Line of MELTRIC Plugs, Receptacles, and Accessories

- Multipin devices available with 4-37 contacts
- Hazardous Location devices for Class 1 & 2 Div 2 and Zone 1/21 & 2/22 environments
- High Temperature devices, up to 30 A, 465°F
- High Amperage devices, up to 600 A
- Power Distribution—Rubber Boxes, Panel Assemblies, Custom Configurations, Receptacle/Wall Box Combinations, and more



Distribution

Our friendly engineering and customer service teams are available Monday - Friday, 7 a.m. - 5 p.m. (Central Time)

Phone: 414-433-2700 Email: mail@meltric.com

MELTRIC excels with the industry's leading delivery times.

Request a free product to try before you buy.

Plug into **BLUE**

meltric.com 4765 W. Oakwood Park Drive • Franklin, WI 53132 414-433-2700 • mail@meltric.com ©2025 MELTRIC Corporation. All rights reserved. DATACENTER6PG A



