


Disconnects

Safety Switch/Receptacle Combinations

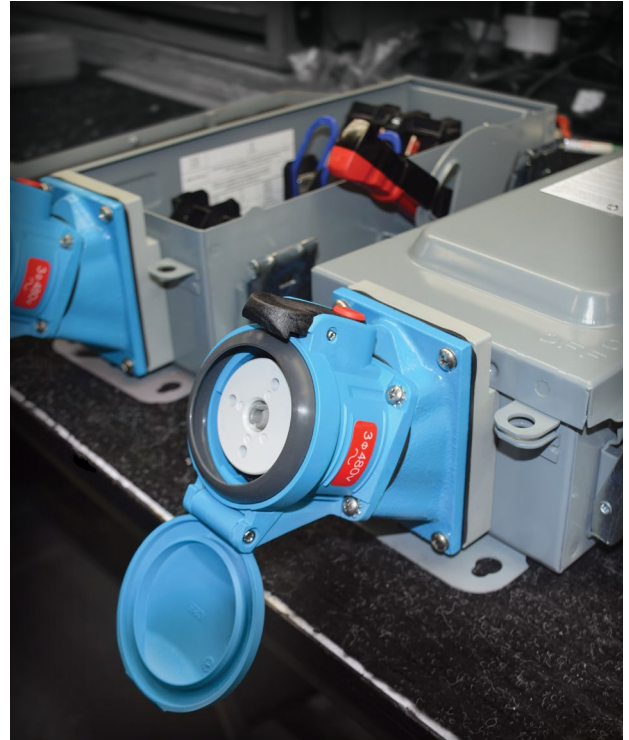

MELTRIC non-interlocked safety switch disconnects are intended for use in power supply applications where additional over current and short circuit protection is desired. Since MELTRIC Switch-Rated Series products are UL and CSA Switch-Rated, there is no need for the receptacle to be interlocked to the switch. The load may be safely made or broken by throwing the switch lever or by simply connecting or disconnecting the plug.

The standard MELTRIC Safety Switch Disconnect consists of a DS Series receptacle and angle mounted and wired to a heavy-duty, single throw, fusible safety switch. They can optionally be provided with DSN series, straight mounting adapters, non-fused switches, or with circuit breaker protection.

Options:

DSN Receptacle (DS is standard)

Straight Adapter (Angle is standard)

Non-Fused (Fused is standard)

Viewing Window

Reverse Service

Canadian CSA listed enclosure

