


DXN25c/DXN37c

DXN25c/DXN37c

PRODUCT FEATURES

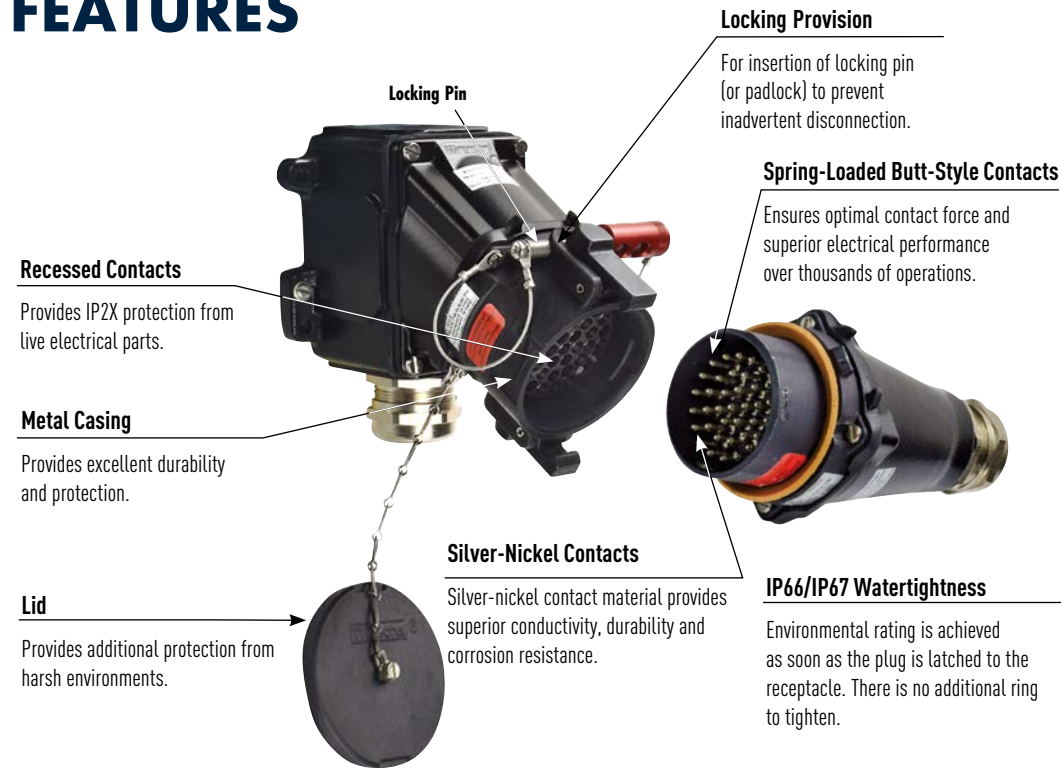

Hazardous Location Listings

ATEX	
II 2 GD Ex e IIC Gb Ex tb IIIC Db Suitable for Zone 1 & 2 (gas) 21 & 22 (dust) Ex ia or ib IIC T6 Gb	
DXN25c	-40°C ≤ Ta ≤ +60°C T5 T71°C -40°C ≤ Ta ≤ +40°C T6 T51°C IECEX LCIE 14.0040X/LCIE 09 ATEX 3050X
DXN37c	-40°C ≤ Ta ≤ +55°C T5 T76°C -40°C ≤ Ta ≤ +40°C T6 T56°C IECEX LCIE 14.0038X/LCIE 07 ATEX 6071X


NOM listing available.
Contact Engineering for more information.

Highlighted Feature

- Crimped Contacts**
DXN25c / DXN37c devices now feature contacts that can be crimped or soldered. Each device is supplied with 26 or 39 contacts so that the product can be set up to suit application needs.


Simple Assembly and Disassembly

DXN37c shown

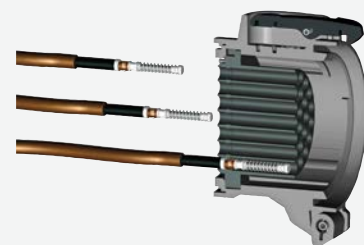

Assembly

To insert contacts when they have been wired is simple. Push wired contact into rear of insulator until it stops to complete the installation.

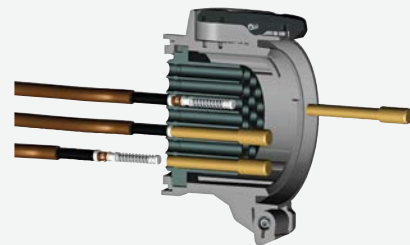

Disassembly

To remove, use the tool provided. Push tool from front onto contact until tool stops. Contact is then released at rear of insulator.

HAZARDOUS LOCATION - MULTIPIN

Accessories rated for hazardous locations are not returnable.

Connector (female receptacle with handle) **Receptacle/ Angle (female)** **Receptacle/ Angle/Box (female)**



Voltage	Polarity	Cable Range	Part # Metal	Part # Metal	Part # Metal
440 V	24P+G	.500-.830"	36D300232M	36D7002	36D000232M
440 V	24P+G	.630-1.050"	36D3002	36D7002	36D0002
220 V	36P+G	.500-.830"	36C300332M	36C7003	36C000332M
220 V	36P+G	.630-1.050"	36C3003	36C7003	36C0003

For international configurations (IEC/CE) visit meltric.com/international-catalog or contact Customer Service at 800-433-7642.

Plug (male inlet w/handle) **Inlet/Angle (male)** **Inlet/Angle/Box (male)**



Voltage	Polarity	Cable Range	Part # Metal	Part # Metal	Part # Metal
440 V	24P+G	.500-.830"	36D100232M	36D9002	36D600232M
440 V	24P+G	.630-1.050"	36D1002	36D9002	36D6002
220 V	36P+G	.500-.830"	36C100332M	36C9003	36C600332M
220 V	36P+G	.630-1.050"	36C1003	36C9003	36C6003

For international configurations (IEC/CE) visit meltric.com/international-catalog or contact Customer Service at 800-433-7642.



ACCESSORIES

MULTI-CONTACT REMOVAL TOOL	EUROPEAN CRIMPING TOOL	BAG OF 13 FEMALE CONTACTS
 61-CA593	 61CA500	 01AA213 Includes insulation sleeves and ferrules
PLUG CAP	CRIMPER TOOL (Greenlee or equal)	BAG OF 13 MALE CONTACTS
 31-3A426	 4CN30	 61CA113 Includes insulation sleeves and ferrules


DIMENSIONS – Provided in Inches

Dimensions are for reference only and may change depending on accessories used. For precise dimensions contact MELTRIC Engineering.

Plug



Wall Box/Angle/ Receptacle/Plug



PRODUCT	A	B	C	D	E	F	G	øH
DXN25C/DXN37C	3.17	3.35	7.26	11.64	7.83	3.70	2.76	0.26

