


MELTRIC PART NUMBERING...



First seven (7) digits for a basic inlet or receptacle part number

One (1) to six (6) suffixes for special features



MELTRIC Product Line Type and Casing Material	AMP (A) Rating		Form and Mounting	Voltage Polarization			Phasing
				Position	Voltage	Hz	
PN/PN7c 01 = Blue Poly 09 = Blue Metal	DSN 1 = 20 3 = 30 6 = 60 8 = 100 9 = 150	DX 2 = 20* 3 = 32* 6 = 63* 9 = 125*	Female 4 = Receptacle	01 = $\frac{220 - 250}{380 - 440}$		50	AC 2 = 2P+G 3 = 3P+G 5 = 1P+N+G 6 = 2P+N+G 7 = 3P+N+G A+ = 2P B+ = 3P C+ = 3P+N D+ = 1P+N G+ = 2P+N
PN12c 03 = Blue Poly 07 = Blue Metal			Male 8 = Inlet	02 = $\frac{20 - 24}{110 - 130}$		60	
PXN12c 06 = Black Metal		PF 3 = 300* 4 = 400* 6 = 600*		03 = $\frac{190 - 230}{255 - 277}$		50	
PNCX 06 = Black Poly	DS 1 = 20 3 = 30 6 = 60 9 = 100 2 = 200*		DX, DXN37c, PXN12c, SPeX Only	04 = $\frac{440 - 480}{25 - 28}$		60	
RETTBOX 15 = Blue Poly		PFQ 3 = 300*		06 = $\frac{110 - 125}{220 - 250}$		50	
DN 19 = Blue Metal	DR 1 = 30 3 = 50 6 = 100 9 = 150 2 = 250* 4 = 400*	DN 1 = 20*(DN9) 6 = 20*(DN20)	Female 0 = Receptacle on box 3 = Connector 4 = Receptacle	07 = $\frac{20 - 24}{480 - 500}$		50	
DXN 22 = Black Poly			Male 1 = Plug 6 = Inlet on Box	08 = $\frac{110 - 130}{115 - 127}$		DC	DC 8** = 2P+G 9 = 2P+G Z+ = 2P P = 2P+2P+G
DXA1 28 = Black Metal				09 = $\frac{115 - 127}{200 - 220}$		400	
DX 26 = Black Metal				10 = $\frac{115 - 127}{200 - 220}$		200	
DS 33 = Blue Poly 35 = Black Poly 36 = Black Metal (HazLoc) 37 = Blue Metal				11 = $\frac{40 - 48}{347 - 600}$		50	
DXN25/37c 36 = Black Metal	PN20 N = 20 (IP66/IP67)			12 = $\frac{120 - 127}{208 - 220}$		60	
DR 31 = Blue Poly 35 = Black Poly 36 = Black Metal (HazLoc) 39 = Blue Metal	PNCX E = 5			13 = $\frac{110 - 125}{220 - 250}$		60	
SPeX 42 = Black Poly	PNHT 2 = 20			14 = $\frac{380 - 440}{660 - 690}$		50	
CS1000/SP 45 = Black Poly	DXN 1 = 20 3 = 30 6 = 60			15 = $\frac{220 - 250}{577/1000}$		DC	
DSP 31 = Blue Poly				16 = $\frac{120 - 127}{208 - 220}$		60	
PFQ 47 = Gray Metal	DXA1 1 = 20			17* = $\frac{255 - 277}{440 - 480}$		60	
PF 49 = Gray Metal				18* = $\frac{255 - 277}{440 - 480}$		60	
DSN 63 = Blue Poly 65 = Black Poly 66 = Black Metal (HazLoc) 69 = Blue Metal				19 = $\frac{255 - 277}{440 - 480}$		60	

* For 50V or less only.
** Includes jumpers.

* For DR devices.

* Available in metal only.


Notes:

- On metal devices, inlets are not painted, receptacles are painted.
- This is the Keying Standard for MELTRIC products. Suffixes are available to accommodate non-interchangeable devices of the same size at the same voltage. Please ask for more details.

...AND ORDERING GUIDE

A MODULAR SYSTEM


MELTRIC products are ordered and assembled in a modular fashion. Customers should select the desired male inlet and female receptacle part numbers. Then matching accessories such as handles, angles, and junction boxes should be identified and added to the order to create plugs, connectors, or other configurations. This modular system allows MELTRIC to build and ship product to customer specifications in a very short time.

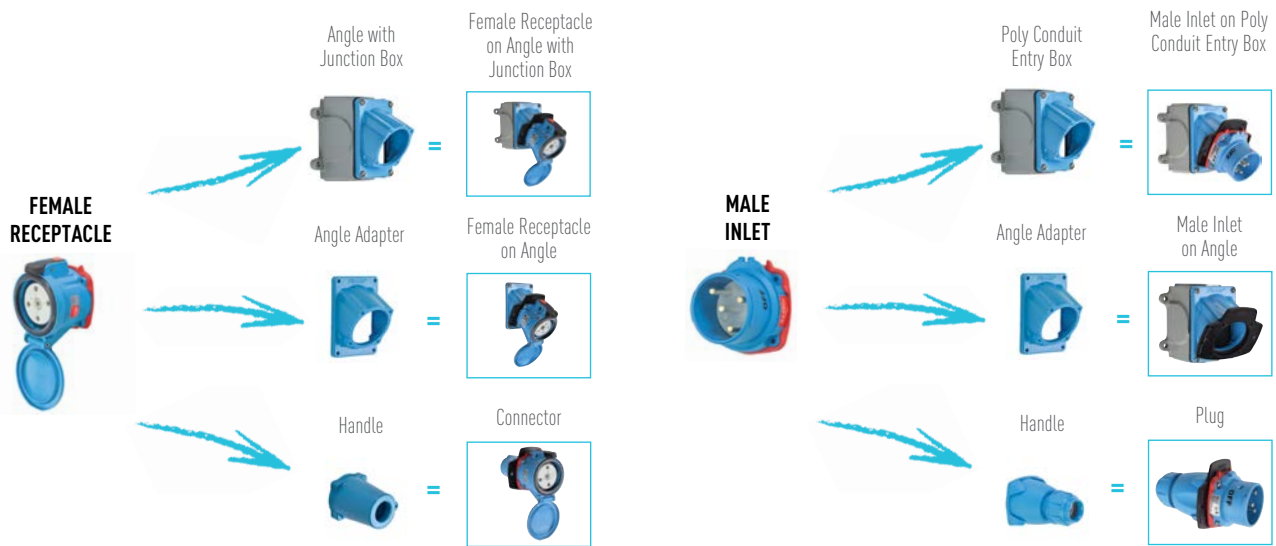






EXAMPLE

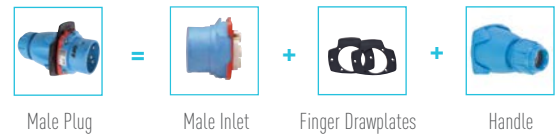

EXAMPLE



TYPICAL ORDER

-  63-34047 Female Receptacle
-  512M3 Angle Adapter for Female
-  63-38047 Male Inlet
-  61-3A346 Finger Drawplates
-  512P0D21 Handle for Male